



GEARDRIVE Sprinklers

Nelson Pro 5500 and Pro 6000 Series gear drives provide superior coverage for small and medium turf areas. Pro 5500 models are ideal for most compact areas; use two rows of 5500's instead of three rows of spray heads. Our Pro 6000 has consistently proven itself as a reliable, easy-to-use gear drive.

All Nelson gear drives are built with a wide range of convenient features. Our exclusive Click-Set® Disk adjusts the same on all gear drive models, allowing quick, easy pattern adjustment. Each series offers models with stainless steel sleeves for added durability in sandy soils.

5500, 6000, 6002*

- **Operating range:** 20-65 psi (1.4-4.6 bars)
- **Pop up height:** 4"
- **Body height:** 7³/₈"

* Anti-drain valve

- 20 per box

5501, 6001 [Shrubhead]

- **Operating range:** 20-65 psi (1.4-4.6 bars)
- **Body height:** 7¹/₂"

- 20 per box

5512, 6012

- **Operating range:** 25-65 psi (1.75-4.6 bars)
- **Pop up height:** 12"
- **Body height:** 16⁷/₈"

• Anti-drain valve

- 10 per box

5505, 6005

- **Operating range:** 25-65 psi (1.75-4.6 bars)
- **Pop up height:** 4"
- **Body height:** 7³/₈"

• Stainless steel sleeve

• Heavy-duty retraction spring

• Anti-drain valve

- 20 per box

18'-51'

GEARDRIVE Sprinklers

Features

5500 series

Unadjusted Radius 18' - 30'
 Discharge 0.5 - 2.5 GPM
 Maximum pressure 75 PSI
 Exposed cap diameter 1 7/8" (47.625mm)
 Cap diameter 2 7/8" (73.025mm)
 Inlet size 3/4" (19.05mm)

6000 series

Unadjusted Radius 30' - 51'
 Discharge 1.0 - 9.5 GPM
 Maximum pressure 75 PSI
 Exposed cap diameter 1 7/8" (47.625mm)
 Cap diameter 2 7/8" (73.025mm)
 Inlet size 3/4" (19.05mm)

Continuous full or part-circle options in one sprinkler head eliminates need for multiple models; choose from 40° - 310° or a complete 360° rotation

Full rubber cover on pop-up models is safe and vandal resistant with standard locking screw and

Through the cap - NIR² (nozzle insertion/radius reduction) on all models. Model number is stamped in cover for easy identification

Patented Click-Set[®] Disk offers adjustable part-circle patterns in 5° increments

Double-lipped wiper seal and stainless steel retraction spring reduce unnecessary service calls by assuring positive retraction, even in sandy soils

Exclusive memory ring maintains pattern even if sprinkler is turned out of arc position

Acu-Cover[®] nozzles provide better close-in watering and eliminate dry spots around head

Ratcheting slip clutch protects gears and motor from damage while adjusting turret for part-circle adjustments - wet or dry

Water lubricated gear motor provides oil-free, quiet, reliable performance


Tall pop-up height assures clearance over high turf areas

Bypass valve reduces pressure loss and standardizes rotation speed regardless of nozzle size, flow rate and inlet pressures

Large area filter provides excellent resistance against sand and debris

Anti-drain valve and heavy-duty spring (ADV models only) help eliminate low head drainage and puddling

5 year warranty on materials and workmanship

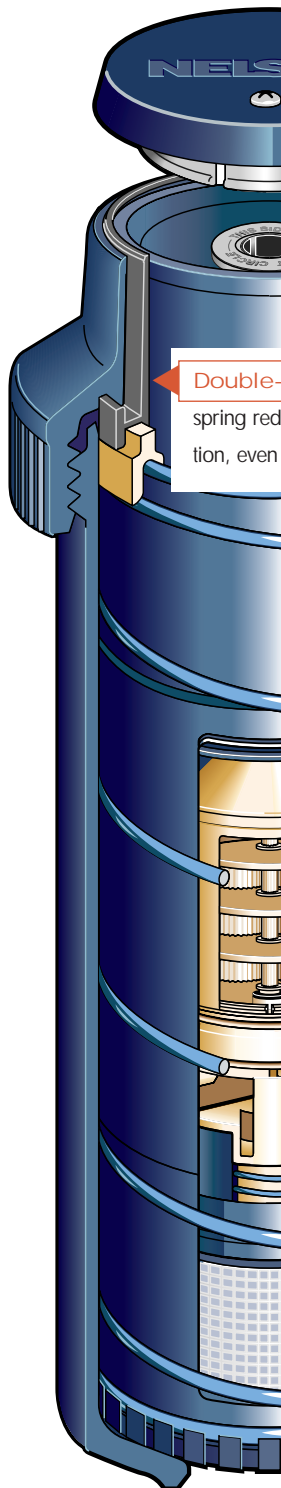

Acu-Cover[®] Nozzle Performance

Pressure PSI	Max Radius		Discharge GPM	Precipitation Rate ¹		Nozzle # & Color	Pressure		Max Radius		Discharge L/min	Precipitation Rate ¹		
	FT	FT		IN/HR	IN/HR▲		BAR	kPa	m	m		m ³ /hr	mm/hr	mm/hr▲
PRO500SERIES - 13° Trajectory														
20	18	14	0.5	0.30	0.37	51	1.4	138	5.5	4.1	1.9	0.11	7.5	9.4
35	20	15	0.7	0.34	0.42		2.5	242	6.1	4.6	2.6	0.16	8.6	10.7
50	21	16	0.8	0.35	0.44		3.5	345	6.4	4.8	3.0	0.18	8.9	11.1
20	20	15	0.8	0.39	0.48	52	1.4	138	6.1	4.6	3.0	0.18	9.8	12.2
35	24	18	1.2	0.40	0.50		2.5	242	7.3	5.5	4.5	0.27	10.2	12.7
50	25	19	1.3	0.40	0.50		3.5	345	7.6	5.7	4.9	0.30	10.2	12.7
20	22	17	1.1	0.44	0.55	53	1.4	138	6.7	5.0	4.2	0.25	11.1	13.9
35	27	20	1.6	0.42	0.53		2.5	242	8.2	6.2	6.1	0.36	10.7	13.4
50	28	21	1.8	0.44	0.55		3.5	345	8.5	6.4	6.8	0.41	11.2	14.0
20	23	17	1.6	0.58	0.73	54	1.4	138	7.0	5.3	6.1	0.36	14.8	18.5
35	31	23	2.2	0.44	0.55		2.5	242	9.5	7.1	8.3	0.50	11.2	14.0
50	32	24	2.5	0.47	0.59		3.5	345	9.8	7.3	9.5	0.57	11.9	14.9
PRO6000SERIES - 25° Trajectory														
20	30	23	1.0	0.21	0.27	4	1.4	138	9.2	6.9	3.8	0.23	5.4	6.8
35	31	23	1.4	0.28	0.35		2.5	242	9.5	7.1	5.3	0.32	7.1	8.9
50	34	26	1.7	0.28	0.35		3.5	345	10.4	7.8	6.4	0.39	7.2	9.0
20	33	25	1.2	0.21	0.26	5	1.4	138	10.1	7.5	4.5	0.27	5.4	6.7
35	37	28	1.6	0.23	0.28		2.5	242	11.3	8.5	6.1	0.36	5.7	7.1
50	38	29	1.9	0.25	0.32		3.5	345	11.6	8.7	7.2	0.43	6.4	8.0
20	32	24	1.4	0.26	0.33	6	1.4	138	9.8	7.3	5.3	0.32	6.7	8.3
35	38	29	1.9	0.25	0.32		2.5	242	11.6	8.7	7.2	0.43	6.4	8.0
50	40	30	2.3	0.28	0.35		3.5	345	12.2	9.2	8.7	0.52	7.0	8.8
20	38	29	2.2	0.29	0.37	7	1.4	138	11.6	8.7	8.3	0.50	7.5	9.3
35	40	30	2.7	0.33	0.41		2.5	242	12.2	9.2	10.2	0.61	8.3	10.3
50	41	31	3.1	0.36	0.44		3.5	345	12.5	9.4	11.7	0.70	9.0	11.3
35	38	29	3.1	0.41	0.52	8	2.5	242	11.6	8.7	11.7	0.70	10.5	13.1
50	42	32	4.0	0.44	0.54		3.5	345	12.8	9.6	15.1	0.91	11.1	13.8
65	43	32	4.6	0.48	0.60		4.6	449	13.1	9.8	17.4	1.04	12.2	15.2
35	42	32	4.2	0.46	0.57	9	2.5	242	12.8	9.6	15.9	0.95	11.6	14.5
50	47	35	5.4	0.47	0.59		3.5	345	14.3	10.8	20.4	1.23	12.0	14.9
65	48	36	6.3	0.53	0.66		4.6	449	14.6	11.0	23.8	1.43	13.4	16.7
35	42	32	5.4	0.59	0.74	10	2.5	242	12.8	9.6	20.4	1.23	15.0	18.7
50	48	36	6.8	0.57	0.71		3.5	345	14.6	11.0	25.7	1.54	14.4	18.0
65	49	37	8.0	0.64	0.80		4.6	449	14.9	11.2	30.3	1.82	16.3	20.3
35	42	32	6.4	0.70	0.87	11	2.5	242	12.8	9.6	24.2	1.45	17.7	22.1
50	48	36	8.1	0.68	0.84		3.5	345	14.6	11.0	30.7	1.84	17.2	21.4
65	51	38	9.5	0.70	0.88		4.6	449	15.6	11.7	36.0	2.16	17.9	22.3
6095LOW ANGLE - 13° Trajectory														
20	26	20	0.9	0.26	0.32	4	1.4	138	7.9	5.9	3.4	0.20	6.5	8.1
35	33	25	1.3	0.23	0.29		2.5	242	10.1	7.5	4.9	0.30	5.8	7.3
50	34	26	1.5	0.25	0.31		3.5	345	10.4	7.8	5.7	0.34	6.3	7.9
20	26	20	1.1	0.31	0.39	5	1.4	138	7.9	5.9	4.2	0.25	8.0	9.9
35	33	25	1.4	0.25	0.31		2.5	242	10.1	7.5	5.3	0.32	6.3	7.8
50	35	26	1.7	0.27	0.33		3.5	345	10.7	8.0	6.4	0.39	6.8	8.5
20	26	20	1.4	0.40	0.50	6	1.4	138	7.9	5.9	5.3	0.32	10.1	12.6
35	33	25	1.9	0.34	0.42		2.5	242	10.1	7.5	7.2	0.43	8.5	10.6
50	36	27	2.3	0.34	0.43		3.5	345	11.0	8.2	8.7	0.52	8.7	10.8
20	31	23	2.5	0.50	0.62	7	1.4	138	9.5	7.1	9.5	0.57	12.7	15.9
35	35	26	3.1	0.49	0.61		2.5	242	10.7	8.0	11.7	0.70	12.4	15.4
50	37	28	3.5	0.49	0.61		3.5	345	11.3	8.5	13.2	0.79	12.5	15.6
35	32	24	3.2	0.60	0.75	8	2.5	242	9.8	7.3	12.1	0.73	15.3	19.1
50	38	29	4.0	0.53	0.67		3.5	345	11.6	8.7	15.1	0.91	13.6	16.9
65	39	29	4.7	0.60	0.74		4.6	449	11.9	8.9	17.8	1.07	15.1	18.9
35	34	26	3.9	0.65	0.81	9	2.5	242	10.4	7.8	14.8	0.89	16.5	20.6
50	37	28	4.9	0.69	0.86		3.5	345	11.3	8.5	18.5	1.11	17.5	21.8
65	40	30	5.7	0.69	0.86		4.6	449	12.2	9.2	21.6	1.29	17.4	21.7
35	33	25	5.1	0.90	1.12	10	2.5	242	10.1	7.5	19.3	1.16	22.9	28.6
50	39	29	6.4	0.81	1.01		3.5	345	11.9	8.9	24.2	1.45	20.6	25.7
65	42	32	7.5	0.82	1.02		4.6	449	12.8	9.6	28.4	1.70	20.8	25.9

¹Precipitation rates for square and triangular spacing calculated at 50% of diameter for half-circle operation. Assumes zero wind for precipitation and radius. Adjust for local conditions.